



1. Model FAB filter is installed on top of a reservoir tank to serve as inlet and air breather.
2. As air breather element, oil resistant air filter material is used because of its high trapped efficiency and porosity.
3. Slotted hole for tank installation gives flexibility for installation dimensions.
(Note: Installation methods of FAB and FA are different.)
4. Yellow paint is used on cover.
5. Model FAB is cheap edition but keeps the function and performance of FA model.



Part List

9	Screw	SS400	4	
8	Packing	Non asbestos	1	
7	Packing	NBR	1	
6	Element	Polyurethane	1	20 μm
5	Inner cover	SPCC	1	
4	Oiling filter	SPCC	1	
3	Flange for fixing	SPCC	1	
2	Inlet	SPCC	1	
1	Cover	SECC	1	
Part No.	Part Name	Material	Qty	Remarks

Packing and screw

Part No. Model	7	8	9
FAB-35	t1.5 × φ 44 / φ 33.0	t1 × φ 68 / φ 30	M4 × 8
FAB-50	t1.5 × φ 64 / φ 52.5	t1 × φ 88 / φ 50	M5 × 10

Model FAB Air Flow Resistance

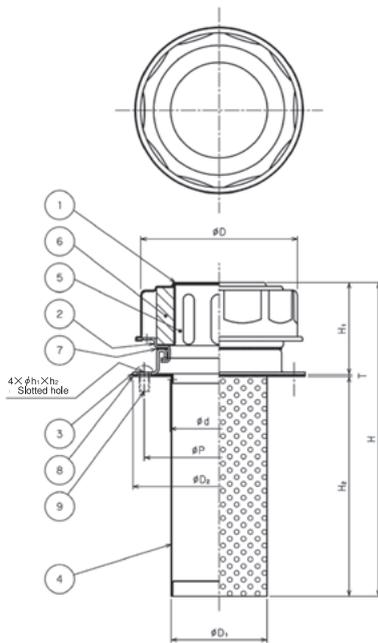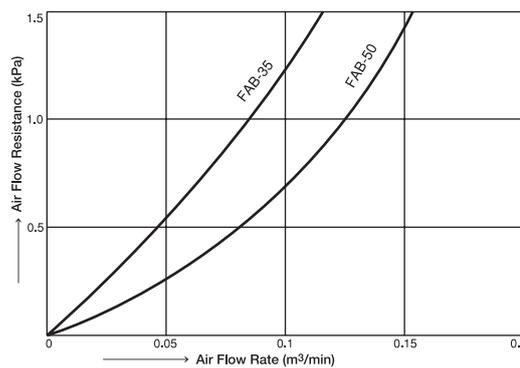

Dimensions

Model	Symbol	D	D1	D2	d	P	H	H1	H2	T	h1	h2	Mass (kg)
FAB-35		58	29	68	30	57	108.3	33.7	73.6	1	4.5	6.5	0.11
FAB-50		80	49	88	50	76.5	162.1	47.5	113.6	1	5.5	7	0.23